


## TYPE ITC/PLTC-ER - Individual & Overall Shielded

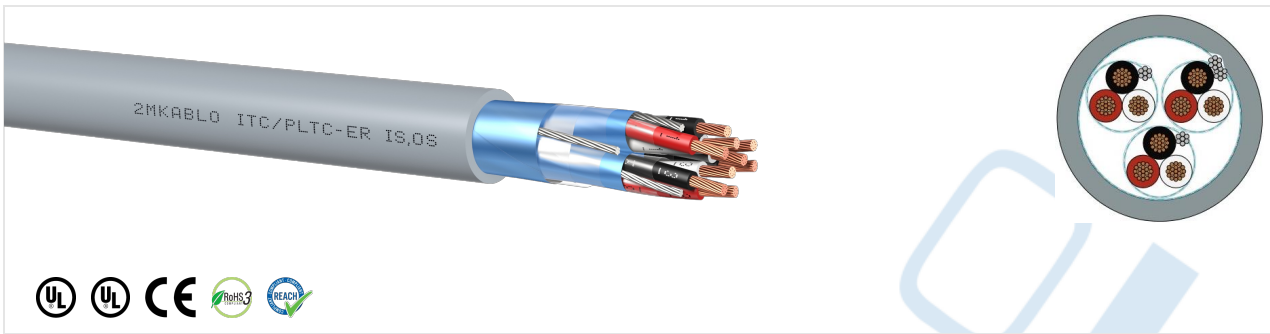

### Areas of Use

Instrumentation cables have a wide range of usage in process control and data processes, in analog and digital signal transmission. Factories, refineries, petrochemical plants, power plants, natural gas filling plants etc. make up the general areas that these cables are used. These cables meet the crush and impact requirements and deformation resistance according to UL 2556.

### Cable Construction

<b>Conductor</b>	Stranded Annealed Copper (ASTM B3)
<b>Core Colors</b>	Pair: Black / White, Numbered Triples: Black / White / Red, Numbered Quad: Black / White / Red / Blue, Numbered
<b>Individual Separator</b>	PET Foil
<b>Individual Screen</b>	Al-PET Foil (with 0.60 mm Tinned Copper Drain Wire)
<b>Lay-up</b>	Shielded pairs / triples / quads are stranded in layers
<b>Separator</b>	PET Foil
<b>Outer Sheath</b>	Heat Resistant and Sunlight Resistant PVC (UL 1581 Class 105 °C), Black, Blue (other colors upon request)
<b>Reference Standards</b>	UL 13, UL 2250, NEC Article 725, NEC Article 727
<b>Overall Screen</b>	Al-PET Foil (with 7x0.3 mm Stranded Tinned Copper)
<b>Insulation</b>	PVC / Nylon (UL 1581 Class 90 °C, EN 50363-3 T13)

### Technical Properties

<b>Operating Voltage</b>	300 V
<b>Test Voltage</b>	1.5 kV
<b>Dielectric Voltage Withstand</b>	UL 2556
<b>Conductor Resistance</b>	UL 1581 - Section 220
<b>Insulation Resistance</b>	>100.1 MΩ/kft (at 15.6 °C)
<b>Max. Operating Temperature</b>	Fixed: -40 °C ... +105 °C, Flexible: -5 °C ... +60 °C
<b>Flame Retardancy</b>	FT4/IEEE 1202 Flame Test (UL 1685), IEC/EN 60332-1, IEC/EN 60332-3-24 (CAT C)
<b>Oil Resistance</b>	ASTM No 2 oil 70 °C 4 hours (IEC / EN 60811- 404)
<b>Sunlight Resistance</b>	Acc. to UL 1581, Sec. 1200
<b>Min. Bending Radius (Fixed)</b>	8 x Cable Diameter

08.02.2025 21:42

**Legal Warning:** The information in this catalog is for marketing purposes. 2M Kablo can change this catalog during product development and any requirements. 2M Kablo can always change designs, technical specifications, images and other informations in this catalog without any notice. This catalog is only a guide and is valid at the time of download, not valid for an offer or contract.

If you need more information about the products in this catalog, please contact us via [info@2mkablo.com](mailto:info@2mkablo.com) or call +90 (212) 222 8250.

