


# TYPE ITC/PLTC-ER - Individual & Overall Shielded Tape Armored

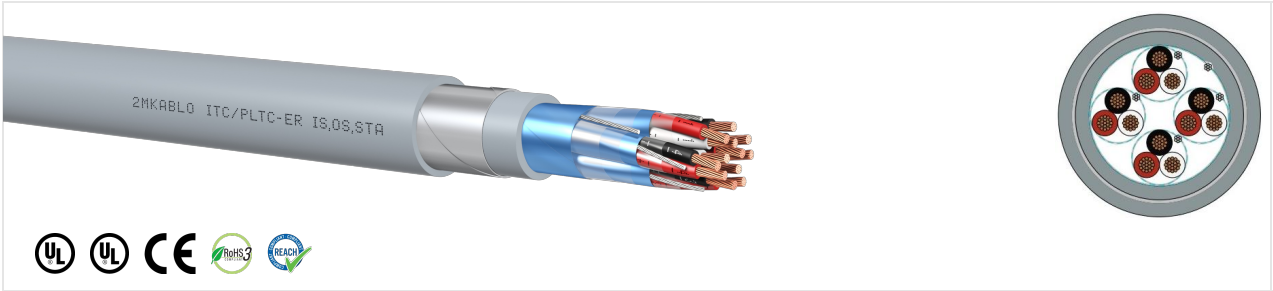

### Areas of Use

Instrumentation cables have a wide range of usage in process control and data processes, in analog and digital signal transmission. Factories, refineries, petrochemical plants, power plants, natural gas filling plants etc. make up the general areas that these cables are used. These cables meets the crush and impact requirements and deformation resistance according to UL 2556.

### Cable Construction

Conductor	Stranded Annealed Copper (ASTM B3)
Insulation	PVC (UL 1581 Class 105°C, EN 50363-3 T13)
Core Colors	Pair: Black / White, Numbered Triples: Black / White / Red, Numbered Quad: Black / White / Red / Blue, Numbered
Individual Sepraor	PET Foil
Individual Screen	Al-PET Foil (with 0.60 mm Tinned Copper Drain Wire)
Lay-up	Shielded pairs / triples / quads are stranded in layers
Separator	PET Foil
Inner Sheath	PVC (UL 1581 Class 105°C)
Outer Sheath	Heat Resistant and Sunlight Resistant PVC (UL 1581 Class 105°C), Black, Blue (other colors upon request)
Reference Standards	UL 13, UL 2250, NEC Article 725, NEC Article 727
Overall Screen	Al-PET Foil (with 7x0.3 mm Stranded Tinned Copper)
Armour	Galvanised Steel Tape

### Technical Properties

Operating Voltage	300 V
Test Voltage	1.5 kV
Dielectric Voltage Withstand	UL 2556
Conductor Resistance	UL 1581 - Section 220
Insulation Resistance	>100.1 MΩ/kft (at 15.6°C)
Max. Operating Temperature	Fixed: -40°C ... +105°C, Flexible: -5°C ... +60°C
Flame Retardancy	FT4/IEEE 1202 Flame Test (UL 1685), IEC/EN 60332-1, IEC/EN 60332-3-24 (CAT C)
Sunlight Resistance	Acc. to UL 1581, Sec. 1200
Min. Bending Radius (Fixed)	8 x Cable Diameter

13.12.2025 21:22

**Legal Warning:** The information in this catalog is for marketing purposes. 2M Kablo can change this catalog during product development and any requirements. 2M Kablo can always change designs, technical specifications, images and other informations in this catalog without any notice.This catalog

is only a guide and is valid at the time of download, not valid for an offer or contract.

If you need more information about the products in this catalog, please contact us via [info@2mkablo.com](mailto:info@2mkablo.com) or call +90 (212) 222 8250.